




US Army Corps  
of Engineers®  
Wilmington District

## EXHIBIT 10: ANCHORING W.KERR SCOTT DAM & RESERVOIR

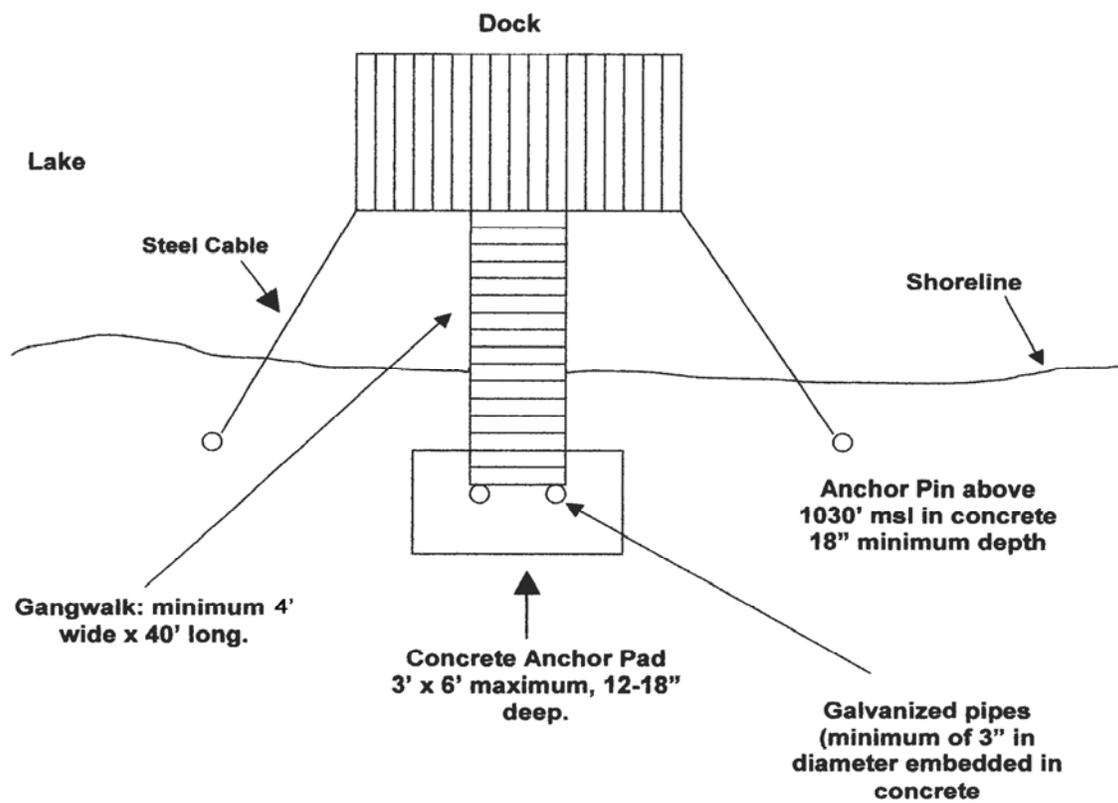

- There should not be a gap greater than 2" between gangwalk and dock.
- Chains, steel cables or U-bolts should be used to anchor gangwalk to shore if poles are used.
- Cables shall not be tied to trees or any type of vegetation.