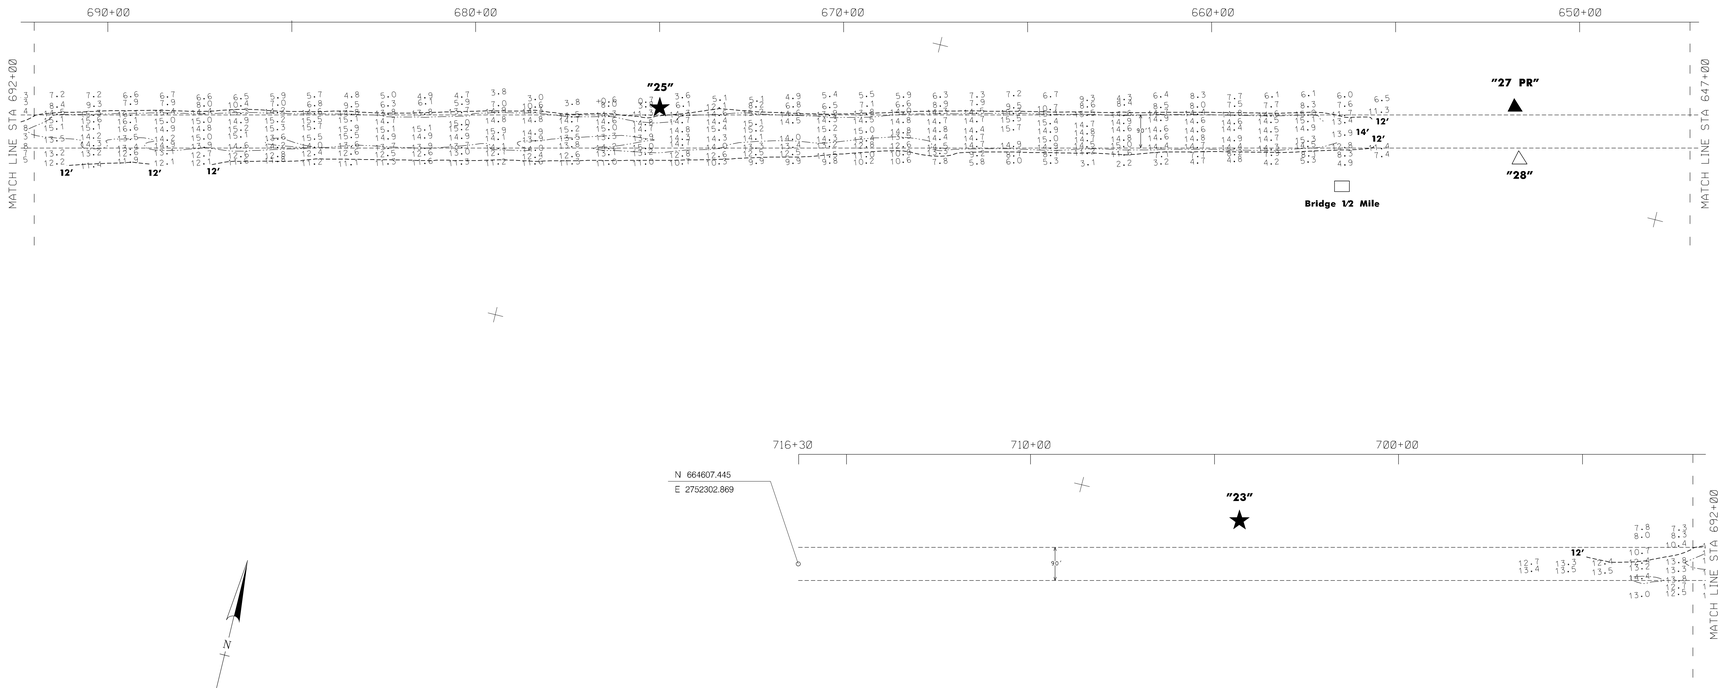

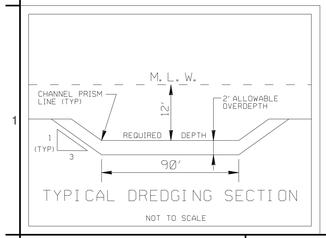

SCALE: 1:2000

200 100 0 100 200 300

SCALE IN FEET

NOTES:

1. SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W.
2. PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL "J. WELLS". USING D.G.P.S. HORIZONTAL POSITIONING EQUIPMENT AND 200 KHZ SOUNDING EQUIPMENT.
3. TIDE GAGE LOCATED AT: MB #120
4. HORIZONTAL DATUM NAD 1983.
5. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME. THESE CONDITIONS ARE SUBJECT TO RAPID CHANGE DUE TO SHOALING EVENTS. A PRUDENT MARINER SHOULD NOT RELY EXCLUSIVELY ON THE INFORMATION PROVIDED HERE.
6. NAVIGATION AIDS LOCATED BY SURVEY VESSEL. ACCURACY +/- 3 METERS. LATITUDE AND LONGITUDE IS EXPRESSED IN DEGREES, DECIMAL MINUTES.

DESCRIPTION		EASTING	NORTHING	LATITUDE	LONGITUDE	
BCN	# 25	2756308	665642	35 33.14072	76 27.42032	
BCN	# 23	2753447	664997	35 33.04642	76 28.00054	- Surveyed 6 June 2007
BCN	# 27PR	2758562	666208	35 33.22446	76 26.96277	- Surveyed 6 June 2007
BCN	# 28	2758610	666059	35 33.19963	76 26.95394	- Surveyed 6 June 2007
MB	# 120	2766121	668110	35 33.50561	76 25.42858	- TIDE GAGE

US Army Corps of Engineers
Wilmington District

SYMBOL	DESCRIPTION	DATE	APPROVED	SYMBOL	DESCRIPTION	DATE	APPROVED

DRAWN BY: TRC, BS
CHECKED BY: MCS
DATE: 23 July 2007
APPROVED BY:
MAP FILE NO.: MOB-BF1-106-01-4
SURVEY DATE: 16 July 2007
FILE NAME: 01-pngp0716ds-dgn
PLOT SCALE: 1:2000

US ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

AFTER DREDGING

ATLANTIC INTRACOASTAL WATERWAY
NORFOLK, VA. AND THE ST. JOHNS RIVER, FLA. (WILMINGTON DISTRICT)

ALLIGATOR-PUNGO RIVER LANDCUT
RANGE 6
STA 647+00 TO STA 716+30

PLATE NUMBER

SHEET OF

.../al-pngp0720cs.dgn 7/27/2007 5:05:13 PM