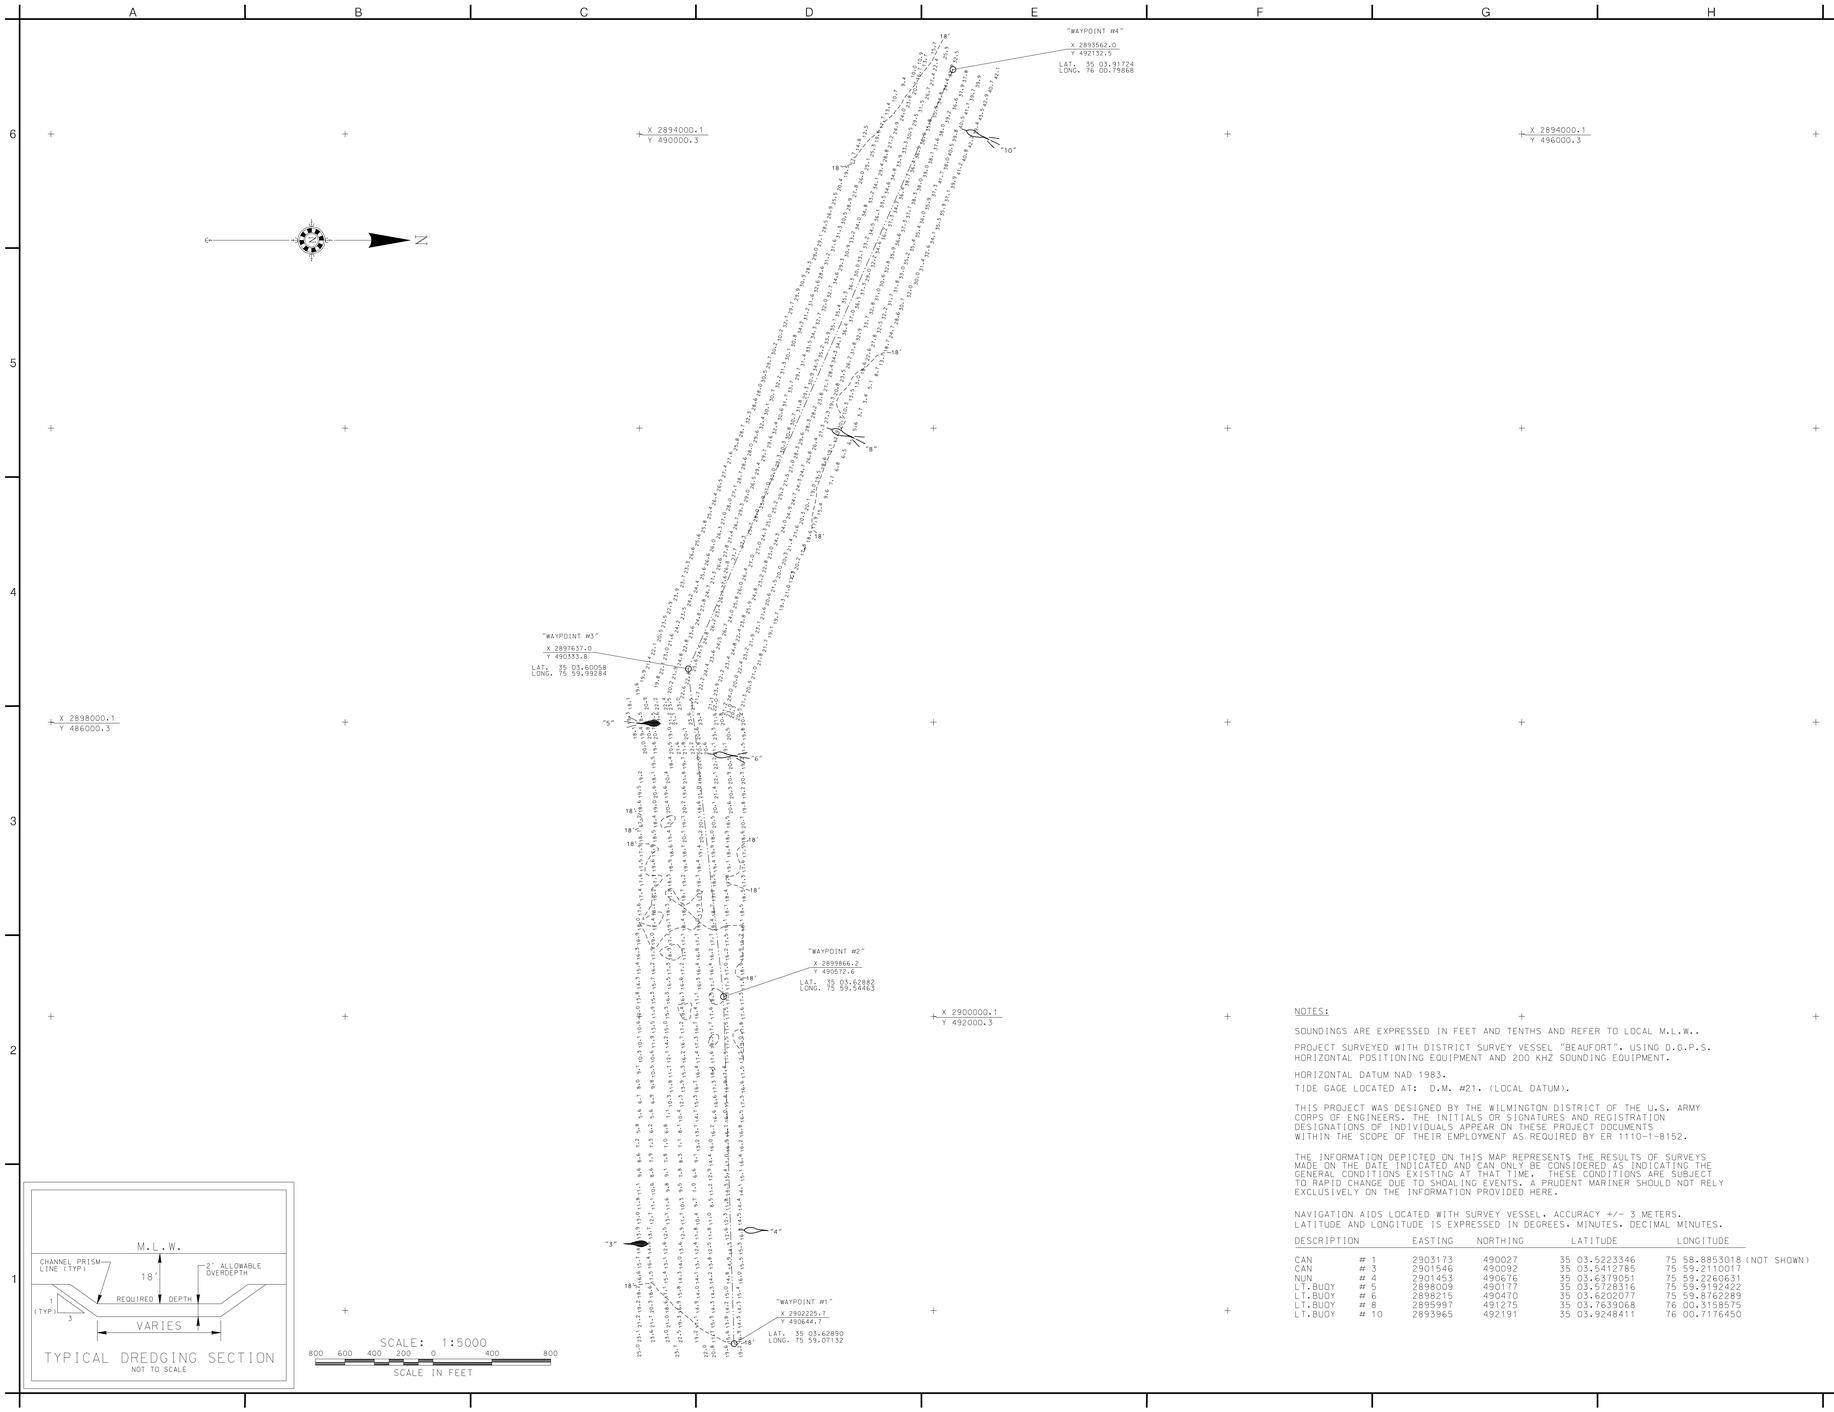

NOTES:

SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W..

PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL "BEAUFORT". USING D.G.P.S. HORIZONTAL POSITIONING EQUIPMENT AND 200 KHZ SOUNDING EQUIPMENT.

HORIZONTAL DATUM NAD 1983.

TIDE GAGE LOCATED AT: D.M. #21. (LOCAL DATUM).

THIS PROJECT WAS DESIGNED BY THE WILMINGTON DISTRICT OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATION DESIGNATIONS OF INDIVIDUALS APPEAR ON THESE PROJECT DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152.

THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME. THESE CONDITIONS ARE SUBJECT TO RAPID CHANGE DUE TO SHOALING EVENTS. A PRUDENT MARINER SHOULD NOT RELY EXCLUSIVELY ON THE INFORMATION PROVIDED HERE.

NAVIGATION AIDS LOCATED WITH SURVEY VESSEL. ACCURACY +/- 3 METERS.
LATITUDE AND LONGITUDE IS EXPRESSED IN DEGREES. MINUTES. DECIMAL MINUTES.

DESCRIPTION		EASTING	NORTHING	LATITUDE	LONGITUDE
CAN	# 1	2903173	490027	35 03.5223346	75 58.8853018 (NOT SHOWN)
CAN	# 3	2901546	490092	35 03.5412785	75 59.2110017
NUN	# 4	2901453	490676	35 03.6379051	75 59.2260631
LT.BUOY	# 5	2898009	490177	35 03.5728316	75 59.9192422
LT.BUOY	# 6	2898215	490470	35 03.6202077	75 59.8762289
LT.BUOY	# 8	2895997	491275	35 03.7639068	76 00.3158575
LT.BUOY	# 10	2893965	492191	35 03.9248411	76 00.7176450

US ARMY CORPS
OF ENGINEERS
WILMINGTON DISTRICT

SYMBOL	DESCRIPTION	DATE APPROVED	SYMBOL	DESCRIPTION	DATE APPROVED

CONTROLLING DEPTH = 11'

SURVEYED BY: | DRAWN BY: D.M.A. | CHECKED BY: J.D.E. | DATE: 20 NOV. 2008
DRAWING APPROVED BY: TIMOTHY A. MILLER, LTC, EN, COMMANDER
MAP FILE NO.: OKI 105-08-1
SURVEY DATE: 18 NOVEMBER 2008
FILE NAME: OKI_1118.DGN
PLOT SCALE: 1:5000

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

OCRACOKE INLET, N.C.

OCRACOKE INLET

PLATE NUMBER

SHEET OF

.../30098AJE/WORK0/oki_1118.dgn 11/20/2008 3:50:03 PM