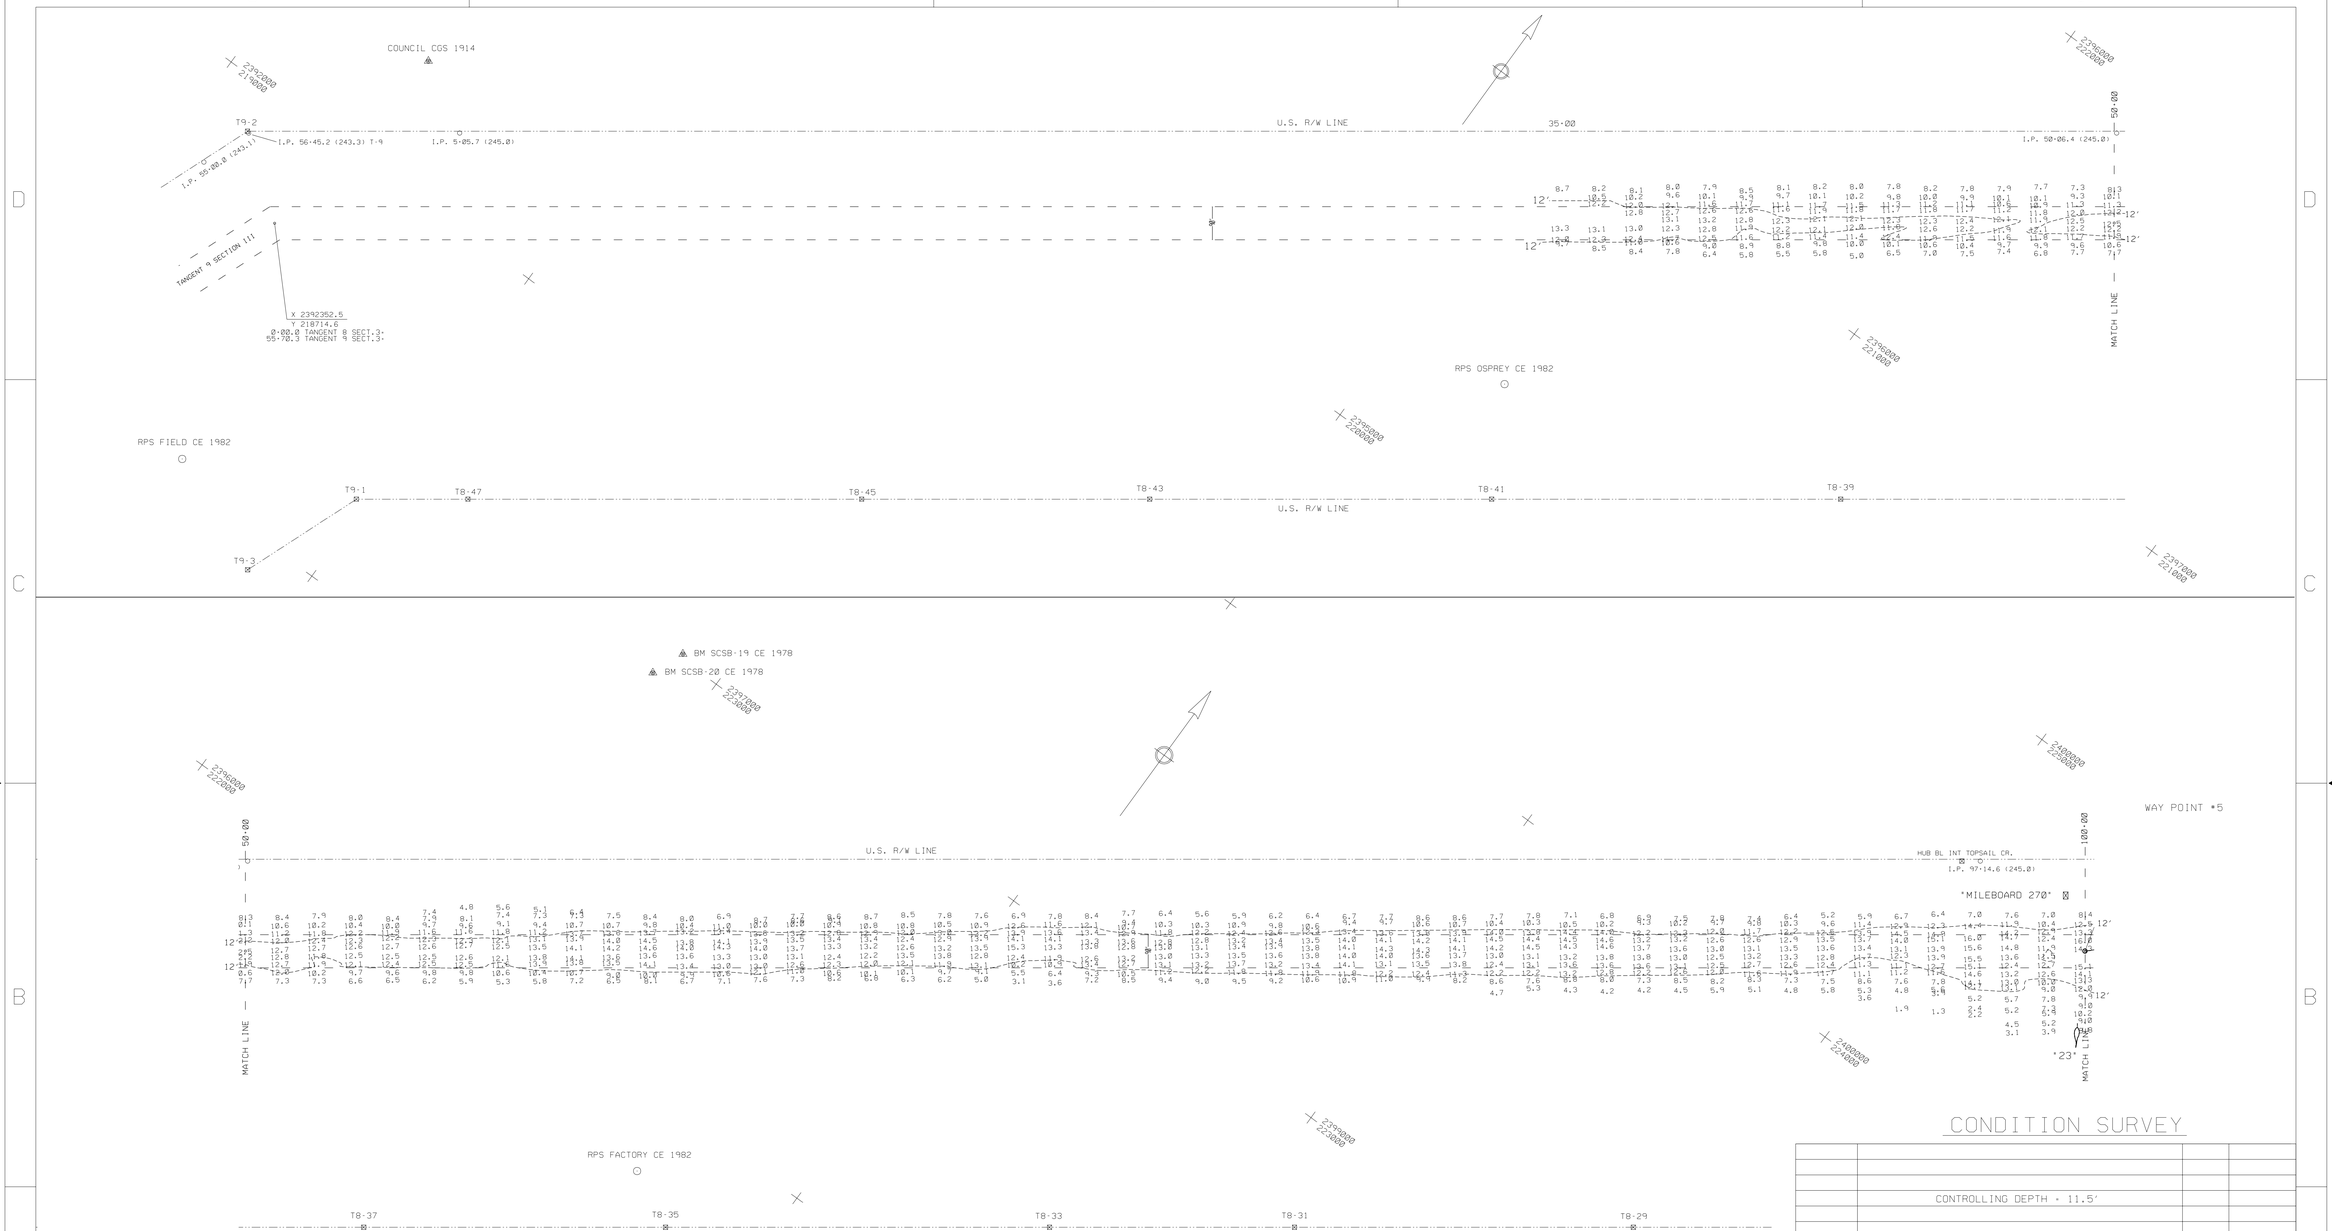

CONDITION SURVEY

NOTES:

SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W..

PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL "HEWETT", USING DGPS HORIZONTAL POSITIONING EQUIPMENT AND 200 KHZ SOUNDING EQUIPMENT.

TIDE GAGE LOCATED AT: MILEBOARD 270, MLW BEAUFORT DATUM.

HORIZONTAL DATUM NAD 1983

THIS PROJECT WAS DESIGNED BY THE WILMINGTON DISTRICT OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATION DESIGNATIONS OF INDIVIDUALS APPEAR ON THESE PROJECT DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152.

THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME. BECAUSE THESE CONDITIONS ARE SUBJECT TO RAPID CHANGE DUE TO SHOALING EVENTS. A PRUDENT MARINER SHOULD NOT RELY EXCLUSIVELY ON THE INFORMATION PROVIDED HERE.

NAVIGATION AIDS LOCATED WITH SURVEY VESSEL. ACCURACY PLUS / MINUS 3 METERS.

MILEBOARD	* 270	2400302	224696	LAT. 34 21.60157	LONG. 77 40.41787
CAN	* 23	2400532	224434	LAT. 34 21.55782	LONG. 77 40.37292

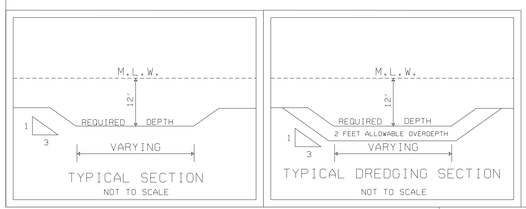

SCALE: 1:2000

200 100 0 100 200 300

SCALE IN FEET

CONTROLLING DEPTH - 11.5'

SYMBOL	DESCRIPTIONS	DATE	APPROVED
	REVISIONS		

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

ATLANTIC INTRACOASTAL WATERWAY
BETWEEN
NORFOLK, VA. AND THE ST. JOHNS RIVER, FLA. (WILMINGTON DISTRICT)
US ARMY CORPS OF ENGINEERS

BEAUFORT TO CAPE FEAR RIVER, N.C.

TANGENT 8 SECTION III

(STA. 36-00 - 100-00)

SURVEYED BY: B.L.H.	SCALE: 1: 2000	PLATE NUMBER:	SURVEYED: 22 MARCH 2004
DRAWN BY: J.D.E.	DATE: 23 MARCH 2004		FILE NAME: TCX082CS.DGN
CHECKED BY:	MAP FILE NO.AIWW		
REVIEWED BY:			SHEET OF
APPROVED BY:			
CHIEF, NAVIGATION BRANCH	BFT-CFR 105-04-13		

NAV/AIWW/BFTCFR/2004/TCX082CS.CO/.XST/.DGN

G:/WEBSITE/tcx082cs.dgn 03/24/2004 03:05:15 PM