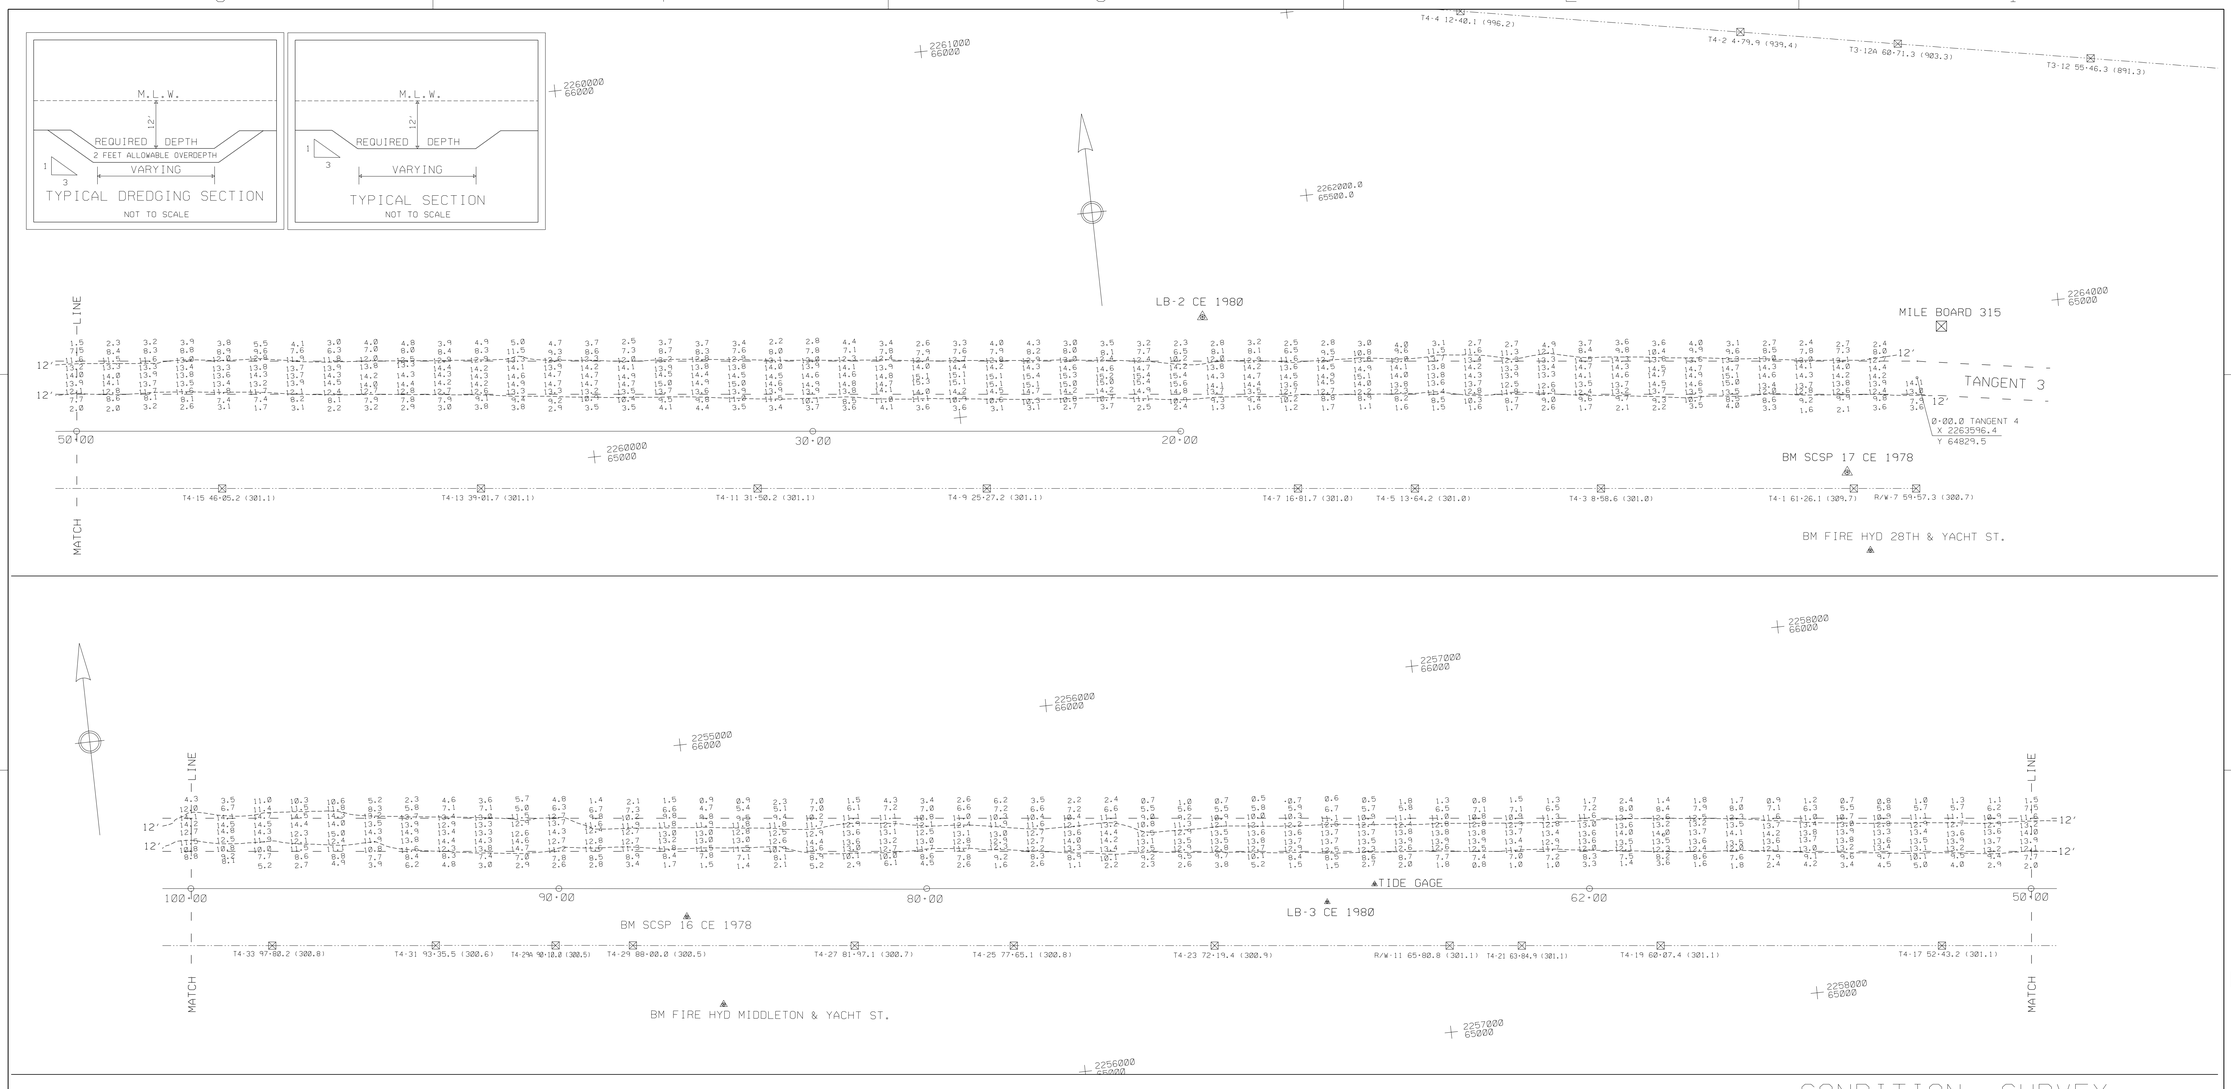

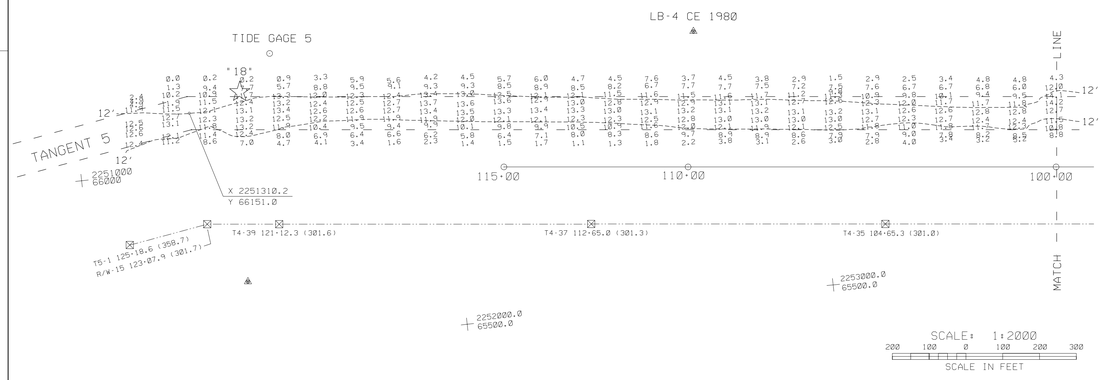

SCALE: 1:2000

SCALE IN FEET

NOTES:

SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W. SOUTHPORT DATUM.

PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL 'HEWETT' USING D.G.P.S. HORIZONTAL POSITIONING EQUIPMENT AND 200 KHZ SOUNGING EQUIPMENT.

TIDE GAGE LOCATED AT: M.B. #315.

HORIZONTAL DATUM NAD 1983.

NAVIGATION AIDS LOCATED WITH SURVEY VESSEL. ACCURACY +/- 3 METERS

DBCN	# 18	2251452	66194	33.92898	78.17119
M.B.	# 315	2263674	64964	33.92532	78.13092

THIS PROJECT WAS DESINGED BY THE WILMINGTON DISTRICT OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATION DESIGNATIONS OF INDIVIDUALS APPEAR ON THESE PROJECT DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152.

THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULT OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

CONDITION SURVEY

SYMBOL	DESCRIPTIONS	DATE	APPROVED
	REVISIONS		

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

ATLANTIC INTRACOASTAL WATERWAY BETWEEN NORFOLK, VA. AND THE ST.JOHNS RIVER, FLA. (WILMINGTON DISTRICT)

US ARMY CORPS OF ENGINEERS

CAPE FEAR RIVER - LITTLE RIVER, S.C.

TANGENT 4

SURVEYED BY: M.A.S.	SCALE: 1:2000	PLATE NUMBER:	SURVEYED: 24 SEPTEMBER 2001
DRAWN BY: J.D.E.	DATE: 25 SEPTEMBER 2001		
CHECKED BY:	MAP FILE NO. AIWW CFR-LR 105-01-44		SHEET OF
REVIEWED BY:			
APPROVED BY:			
CHIEF, NAVIGATION BRANCH			

AIWW/CFRLR/2001/T4CS267.CO/.XST/.DGN

.../3009aaje/aiww/cflr/t4cs267.dgn Sep. 25, 2001 08:32:17