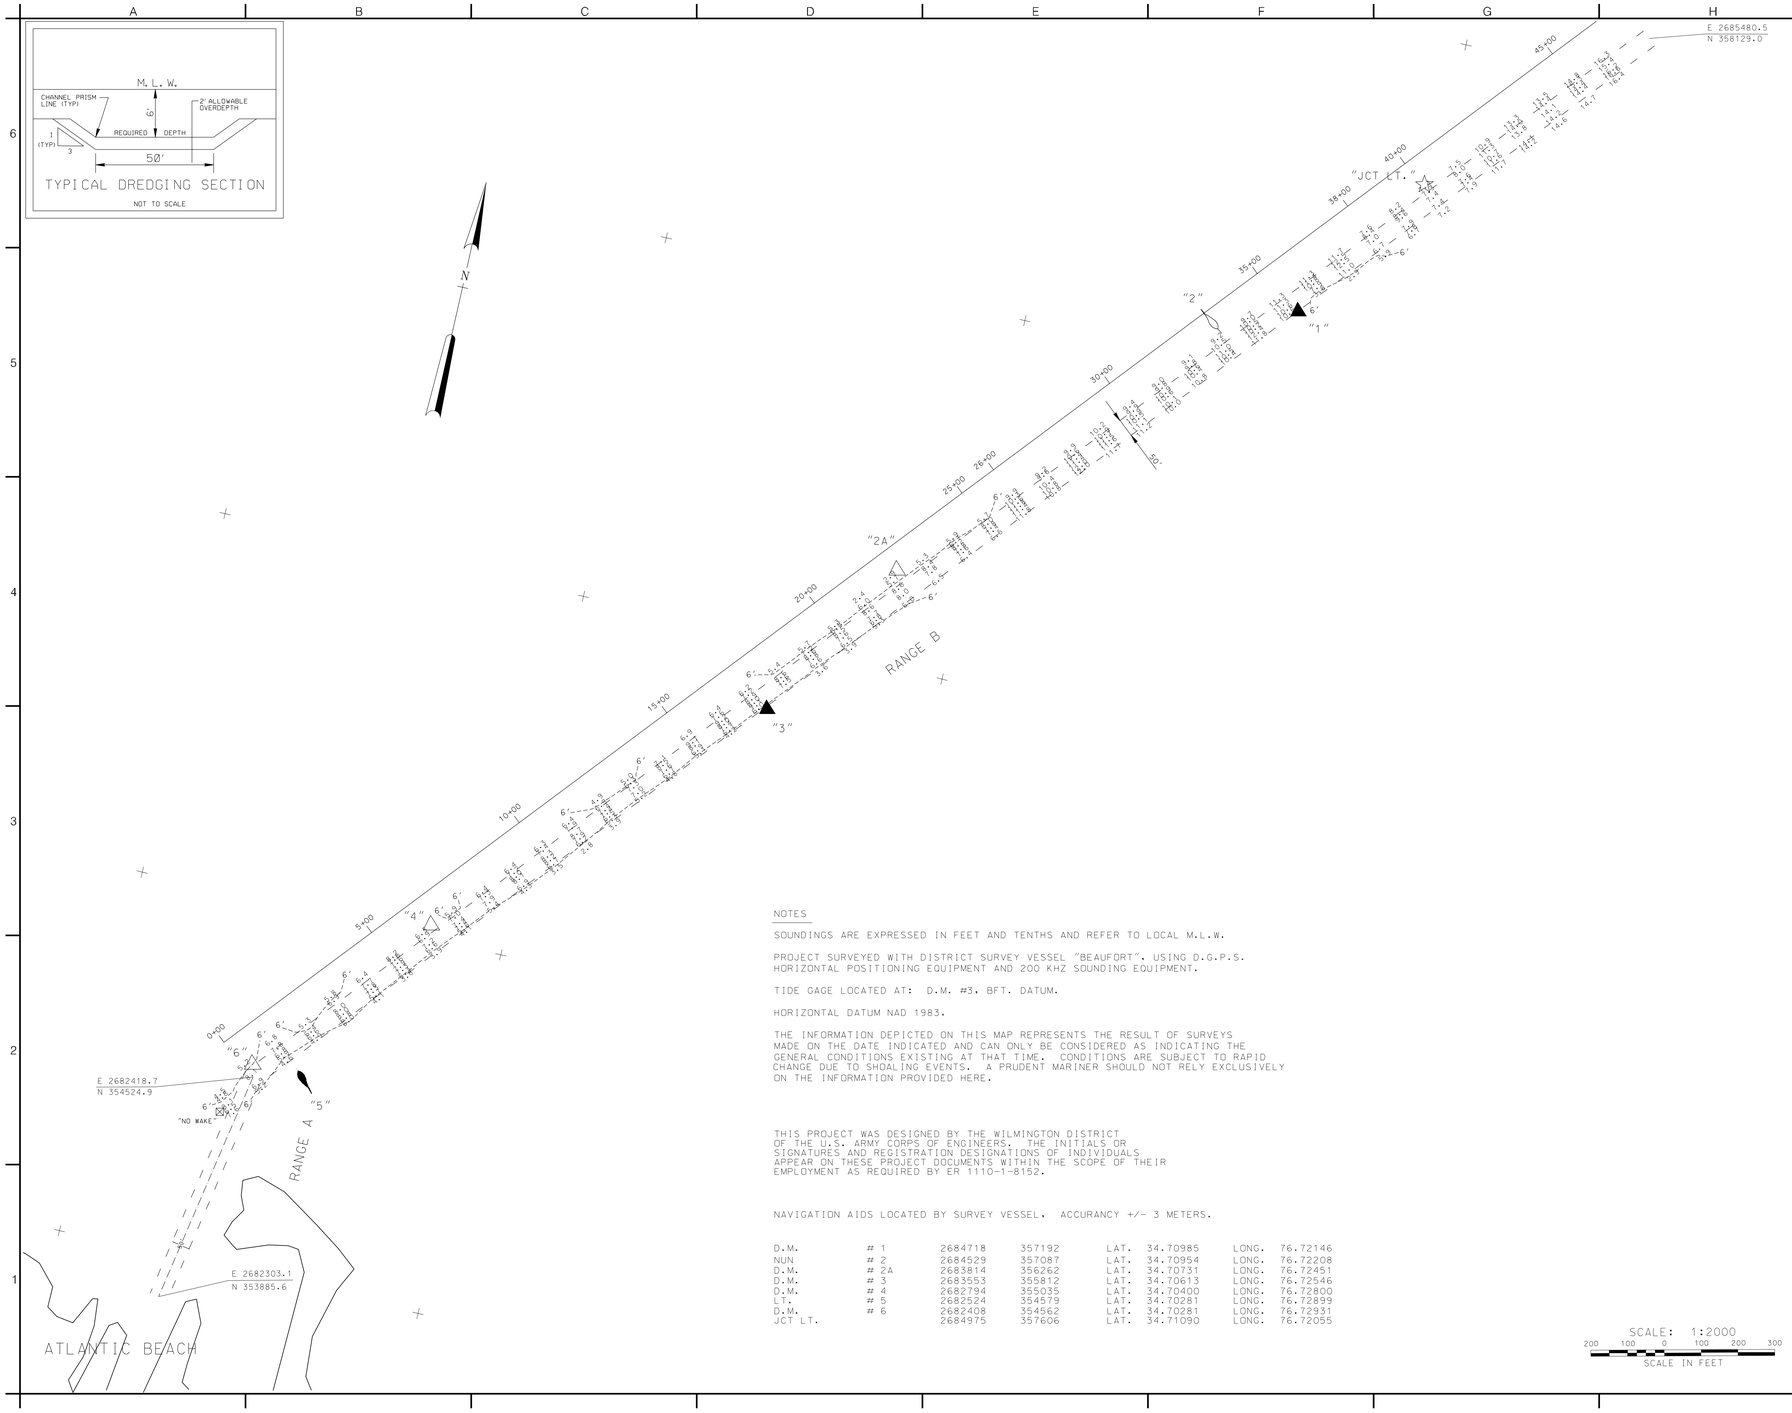

NOTES

SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W.

PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL "BEAUFORT". USING D.G.P.S. HORIZONTAL POSITIONING EQUIPMENT AND 200 KHZ SOUNDING EQUIPMENT.

TIDE GAGE LOCATED AT: D.M. #3. BFT. DATUM.

HORIZONTAL DATUM NAD 1983.

THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULT OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME. CONDITIONS ARE SUBJECT TO RAPID CHANGE DUE TO SHOALING EVENTS. A PRUDENT MARINER SHOULD NOT RELY EXCLUSIVELY ON THE INFORMATION PROVIDED HERE.

THIS PROJECT WAS DESIGNED BY THE WILMINGTON DISTRICT OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATION DESIGNATIONS OF INDIVIDUALS APPEAR ON THESE PROJECT DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152.

NAVIGATION AIDS LOCATED BY SURVEY VESSEL. ACCURANCY +/- 3 METERS.

D.M.	# 1	2684718	357192	LAT.	34.70985	LONG.	76.72146
NUN	# 2	2684529	357087	LAT.	34.70954	LONG.	76.72208
D.M.	# 2A	2683814	356262	LAT.	34.70731	LONG.	76.72451
D.M.	# 3	2683553	355812	LAT.	34.70613	LONG.	76.72546
D.M.	# 4	2682794	355035	LAT.	34.70400	LONG.	76.72800
LT.	# 5	2682524	354579	LAT.	34.70281	LONG.	76.72899
D.M.	# 6	2682408	354562	LAT.	34.70281	LONG.	76.72931
JCT LT.		2684975	357606	LAT.	34.71090	LONG.	76.72055

SCALE: 1:2000

200 100 0 100 200 300

SCALE IN FEET

US Army Corps of Engineers
Wilmington District

SYMBOL	DESCRIPTION	DATE	APPROVED	SYMBOL	DESCRIPTION	DATE	APPROVED

SURVEYED BY: C.P.P.
DRAWNED BY: J.S.L.
CHECKED BY:
REVIEWED BY:
DATE: 15 SEPT. 2003

APPROVED BY: CHIEF, NAVIGATION BRANCH
NAME: MAP 1 OF 10
ABC 105-03-3
SURVEYED: 10 SEPTEMBER 2003
FILE NAME: MNY253CS.DGN
PLOT SCALE: 1:2000

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

CONDITION SURVEY

ATLANTIC BEACH CHANNELS, N.C.

MONEY ISLAND CHANNEL
RANGE B

PLATE NUMBER

SHEET OF

/2002/MNY152AD.CO/.DGN/MNY152RB.XST

.../3009SAJE/ATL-CH/mny253cs.dgn 09/15/2003 10:49:21 AM