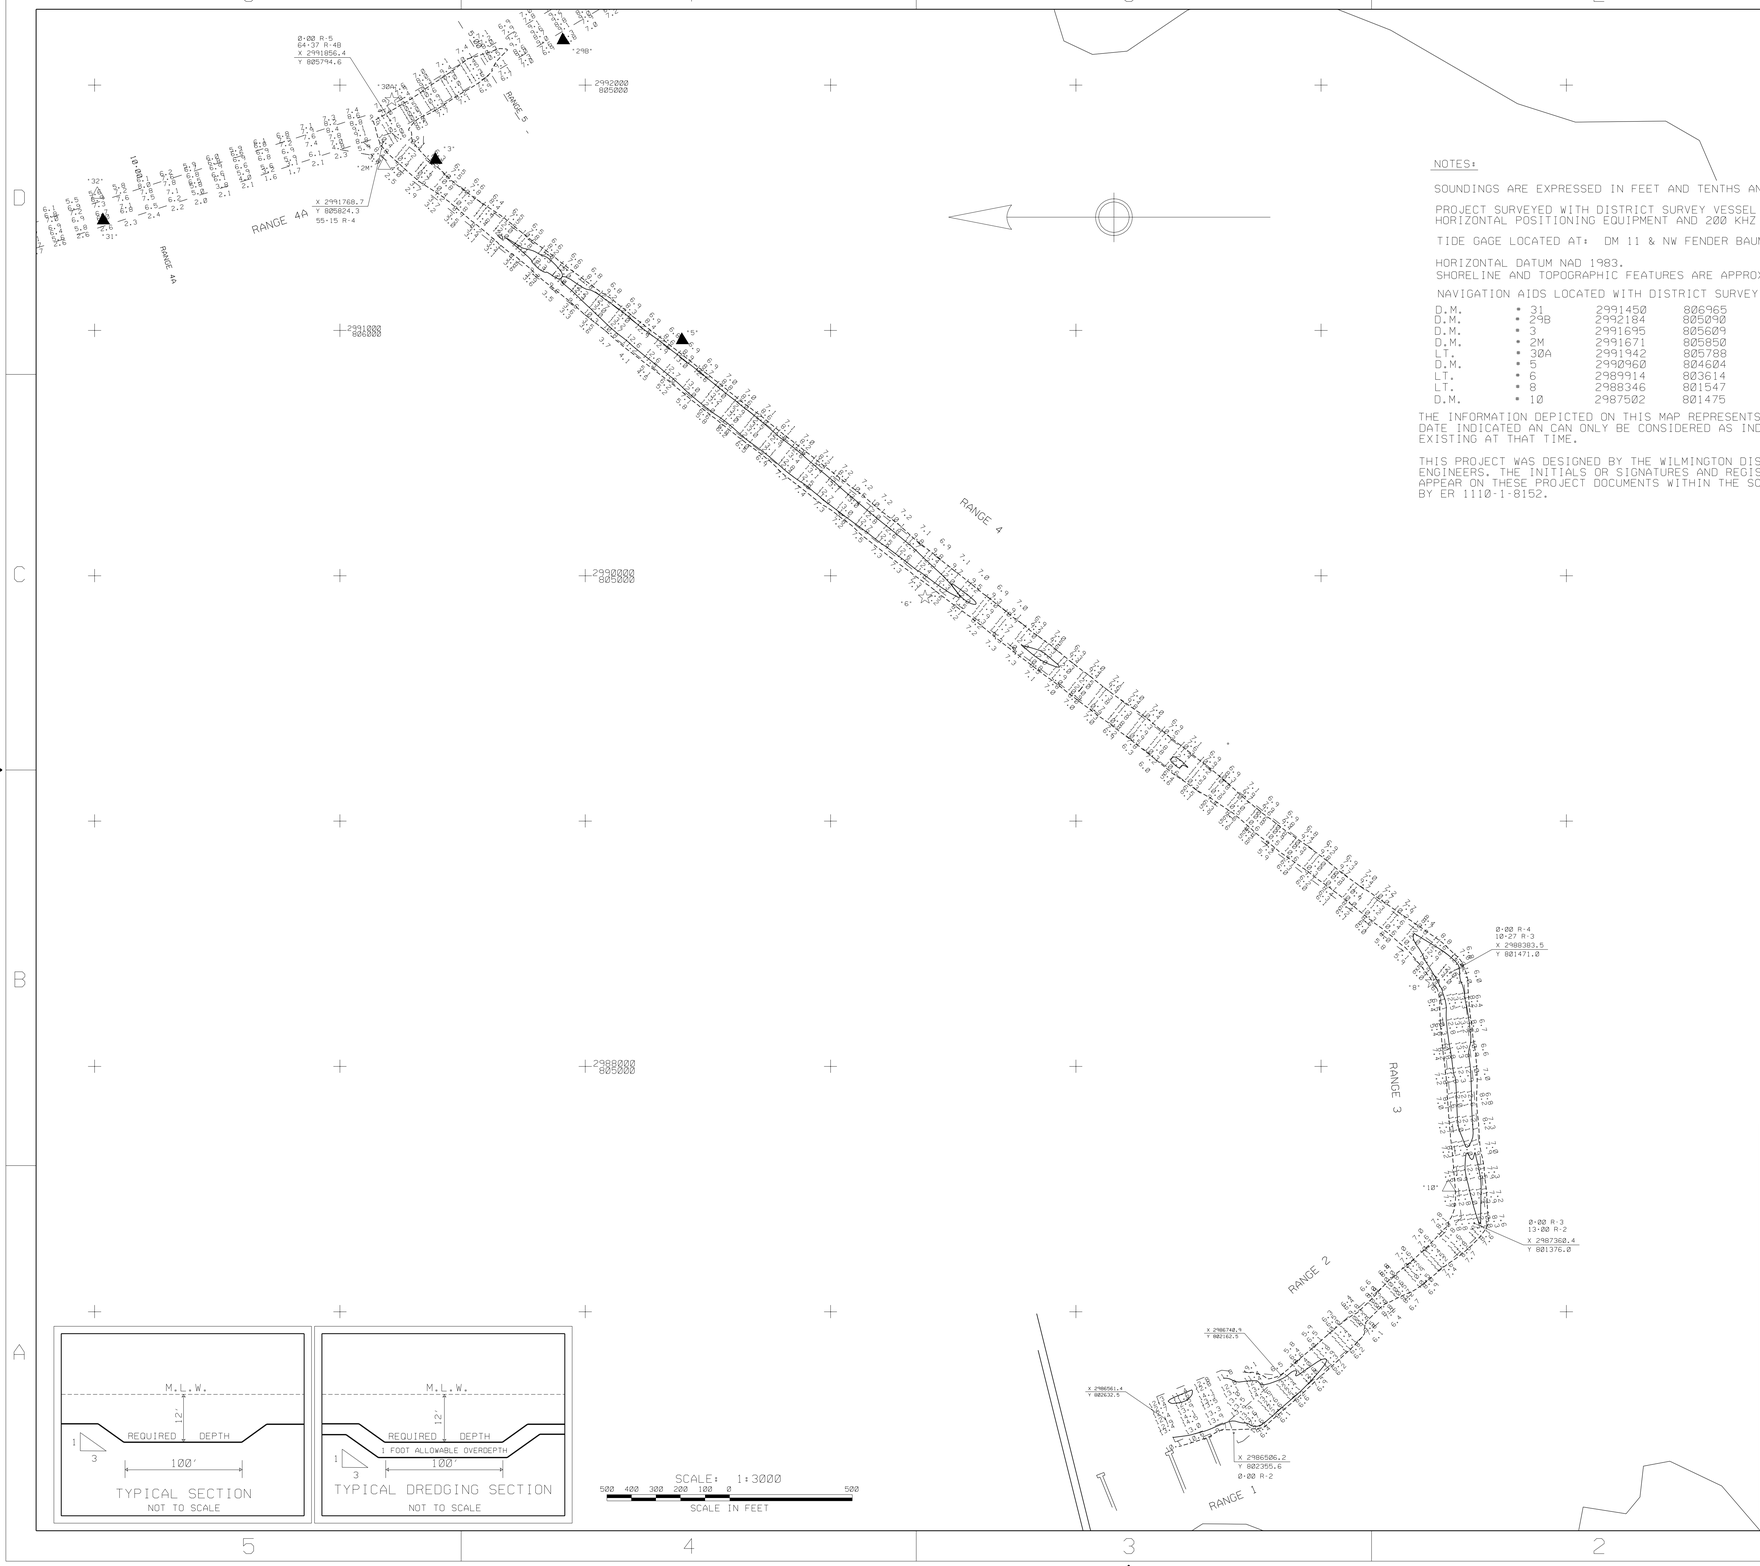

NOTES:

SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W..

PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL 'BEAUFORT & J. WELLS', USING D.G.P.S. HORIZONTAL POSITIONING EQUIPMENT AND 200 KHZ SOUNDING EQUIPMENT.

TIDE GAGE LOCATED AT: DM 11 & NW FENDER BAUM BRIDGE.

HORIZONTAL DATUM NAD 1983.
SHORELINE AND TOPOGRAPHIC FEATURES ARE APPROXIMATELY LOCATED.

NAVIGATION AIDS LOCATED WITH DISTRICT SURVEY VESSEL. ACCURACY +/- 3 METERS.

D.M.	• 31	2991450	806965	LAT.	35.92127	LONG.	75.65087
D.M.	• 29B	2992184	805090	LAT.	35.91605	LONG.	75.64861
D.M.	• 3	2991695	805609	LAT.	35.91752	LONG.	75.65020
D.M.	• 2M	2991671	805850	LAT.	35.91819	LONG.	75.65025
LT.	• 30A	2991942	805798	LAT.	35.91799	LONG.	75.64934
D.M.	• 5	2992960	804604	LAT.	35.91483	LONG.	75.65279
LT.	• 6	2989914	803614	LAT.	35.91221	LONG.	75.65643
LT.	• 8	2988346	801547	LAT.	35.90668	LONG.	75.66196
D.M.	• 10	2987502	801475	LAT.	35.90656	LONG.	75.66482

THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULT OF SURVEYS MADE ON THE DATE INDICATED AN CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

THIS PROJECT WAS DESIGNED BY THE WILMINGTON DISTRICT OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATION DESIGNATIONS OF INDIVIDUALS APPEAR ON THESE PROJECT DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152.

CONDITION SURVEY

SYMBOL	DESCRIPTIONS	DATE	APPROVED
	REVISIONS		

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

MANTEO (SHALLOWBAG BAY) NORTH CAROLINA

US ARMY CORPS OF ENGINEERS

RANGES 1 THRU 4

SURVEYED BY: C.R.P.	SCALE: 1:3000	PLATE NUMBER:	SURVEYED: 16.17 APRIL 2003
DRAWN BY: J.R.A.	DATE: 21 APRIL 2003		
CHECKED BY:	MAP FILE NO. MB 105-03-25		SHEET OF
REVIEWED BY:			
APPROVED BY:			
CHIEF NAVIGATION BRANCH			

/MANTEO/2003/MC1CS107.CO/.XST/ MAN107CS.DGN
/MANTEO/2003/MC2CS107.CO/.XST/ MAN107CS.DGN
/MANTEO/2003/MC3CS107.CO/.XST/ MAN107CS.DGN
/MANTEO/2003/MC4CS107.CO/.XST/ MAN107CS.DGN

G:/WEBSITE/man107.dgn 05/15/2003 10:14:27 AM