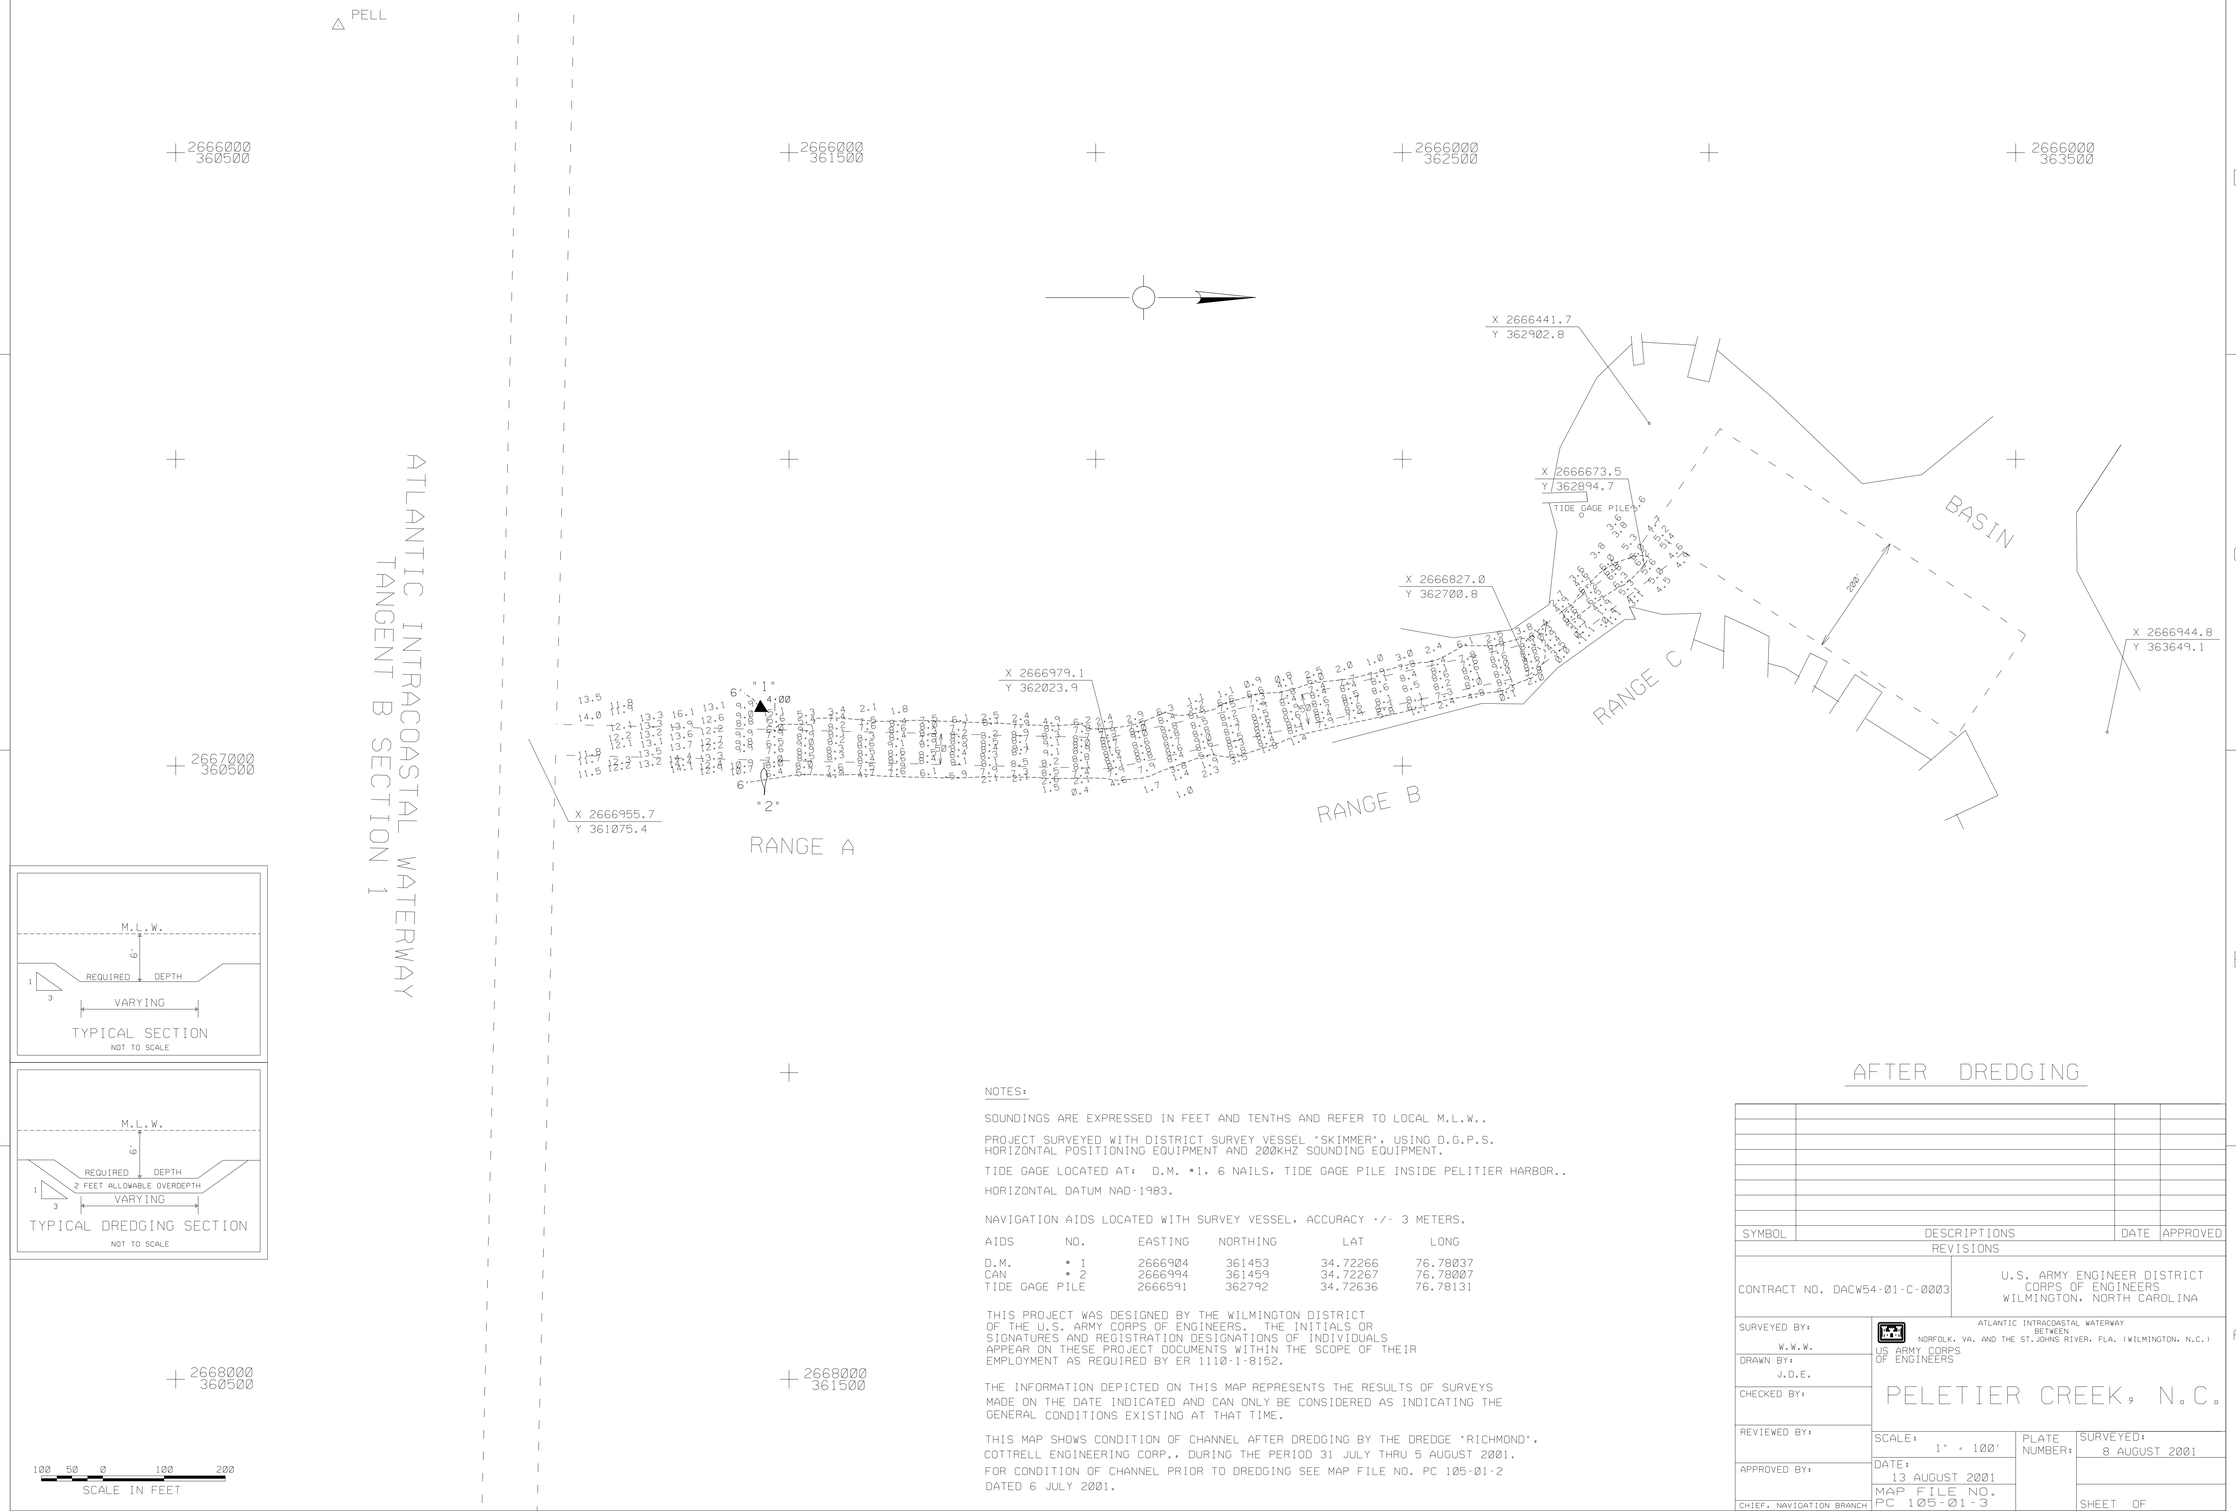

NOTES:

SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W..

PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL "SKIMMER", USING D.G.P.S. HORIZONTAL POSITIONING EQUIPMENT AND 200KHZ SOUNDING EQUIPMENT.

TIDE GAGE LOCATED AT: D.M. #1, 6 NAILS, TIDE GAGE PILE INSIDE PELITIER HARBOR..

HORIZONTAL DATUM NAD-1983.

NAVIGATION AIDS LOCATED WITH SURVEY VESSEL, ACCURACY +/- 3 METERS.

AIDS	NO.	EASTING	NORTHING	LAT	LONG
D.M.	# 1	2666904	361453	34.72266	76.78037
CAN	# 2	2666994	361459	34.72267	76.78007
TIDE GAGE PILE		2666591	362792	34.72636	76.78131

THIS PROJECT WAS DESIGNED BY THE WILMINGTON DISTRICT OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATION DESIGNATIONS OF INDIVIDUALS APPEAR ON THESE PROJECT DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152.

THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

THIS MAP SHOWS CONDITION OF CHANNEL AFTER DREDGING BY THE DREDGE "RICHMOND", COTTRELL ENGINEERING CORP., DURING THE PERIOD 31 JULY THRU 5 AUGUST 2001.

FOR CONDITION OF CHANNEL PRIOR TO DREDGING SEE MAP FILE NO. PC 105-01-2 DATED 6 JULY 2001.

AFTER DREDGING

SYMBOL	DESCRIPTIONS	DATE	APPROVED
	REVISIONS		

CONTRACT NO. DACW54-01-C-0003

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

US ARMY CORPS OF ENGINEERS

ATLANTIC INTRACOASTAL WATERWAY
BETWEEN
NORFOLK, VA. AND THE ST.JOHNS RIVER, FLA. (WILMINGTON, N.C.)

PELETIER CREEK, N.C.

SURVEYED BY: W.W.W.
DRAWN BY: J.D.E.
CHECKED BY:
REVIEWED BY:
APPROVED BY:
CHIEF, NAVIGATION BRANCH

SCALE: 1" = 100'
DATE: 13 AUGUST 2001
MAP FILE NO. PC 105-01-3
PLATE NUMBER:
SURVEYED: 8 AUGUST 2001
SHEET OF

PELITER/2001/PEL220AD.CO/.DGN/PEL220RA.XST, PEL220RB.XST, PEL220RC.XST

.../3009aaje/peltier/pel220ad.dgn Aug. 15, 2001 13:43:04