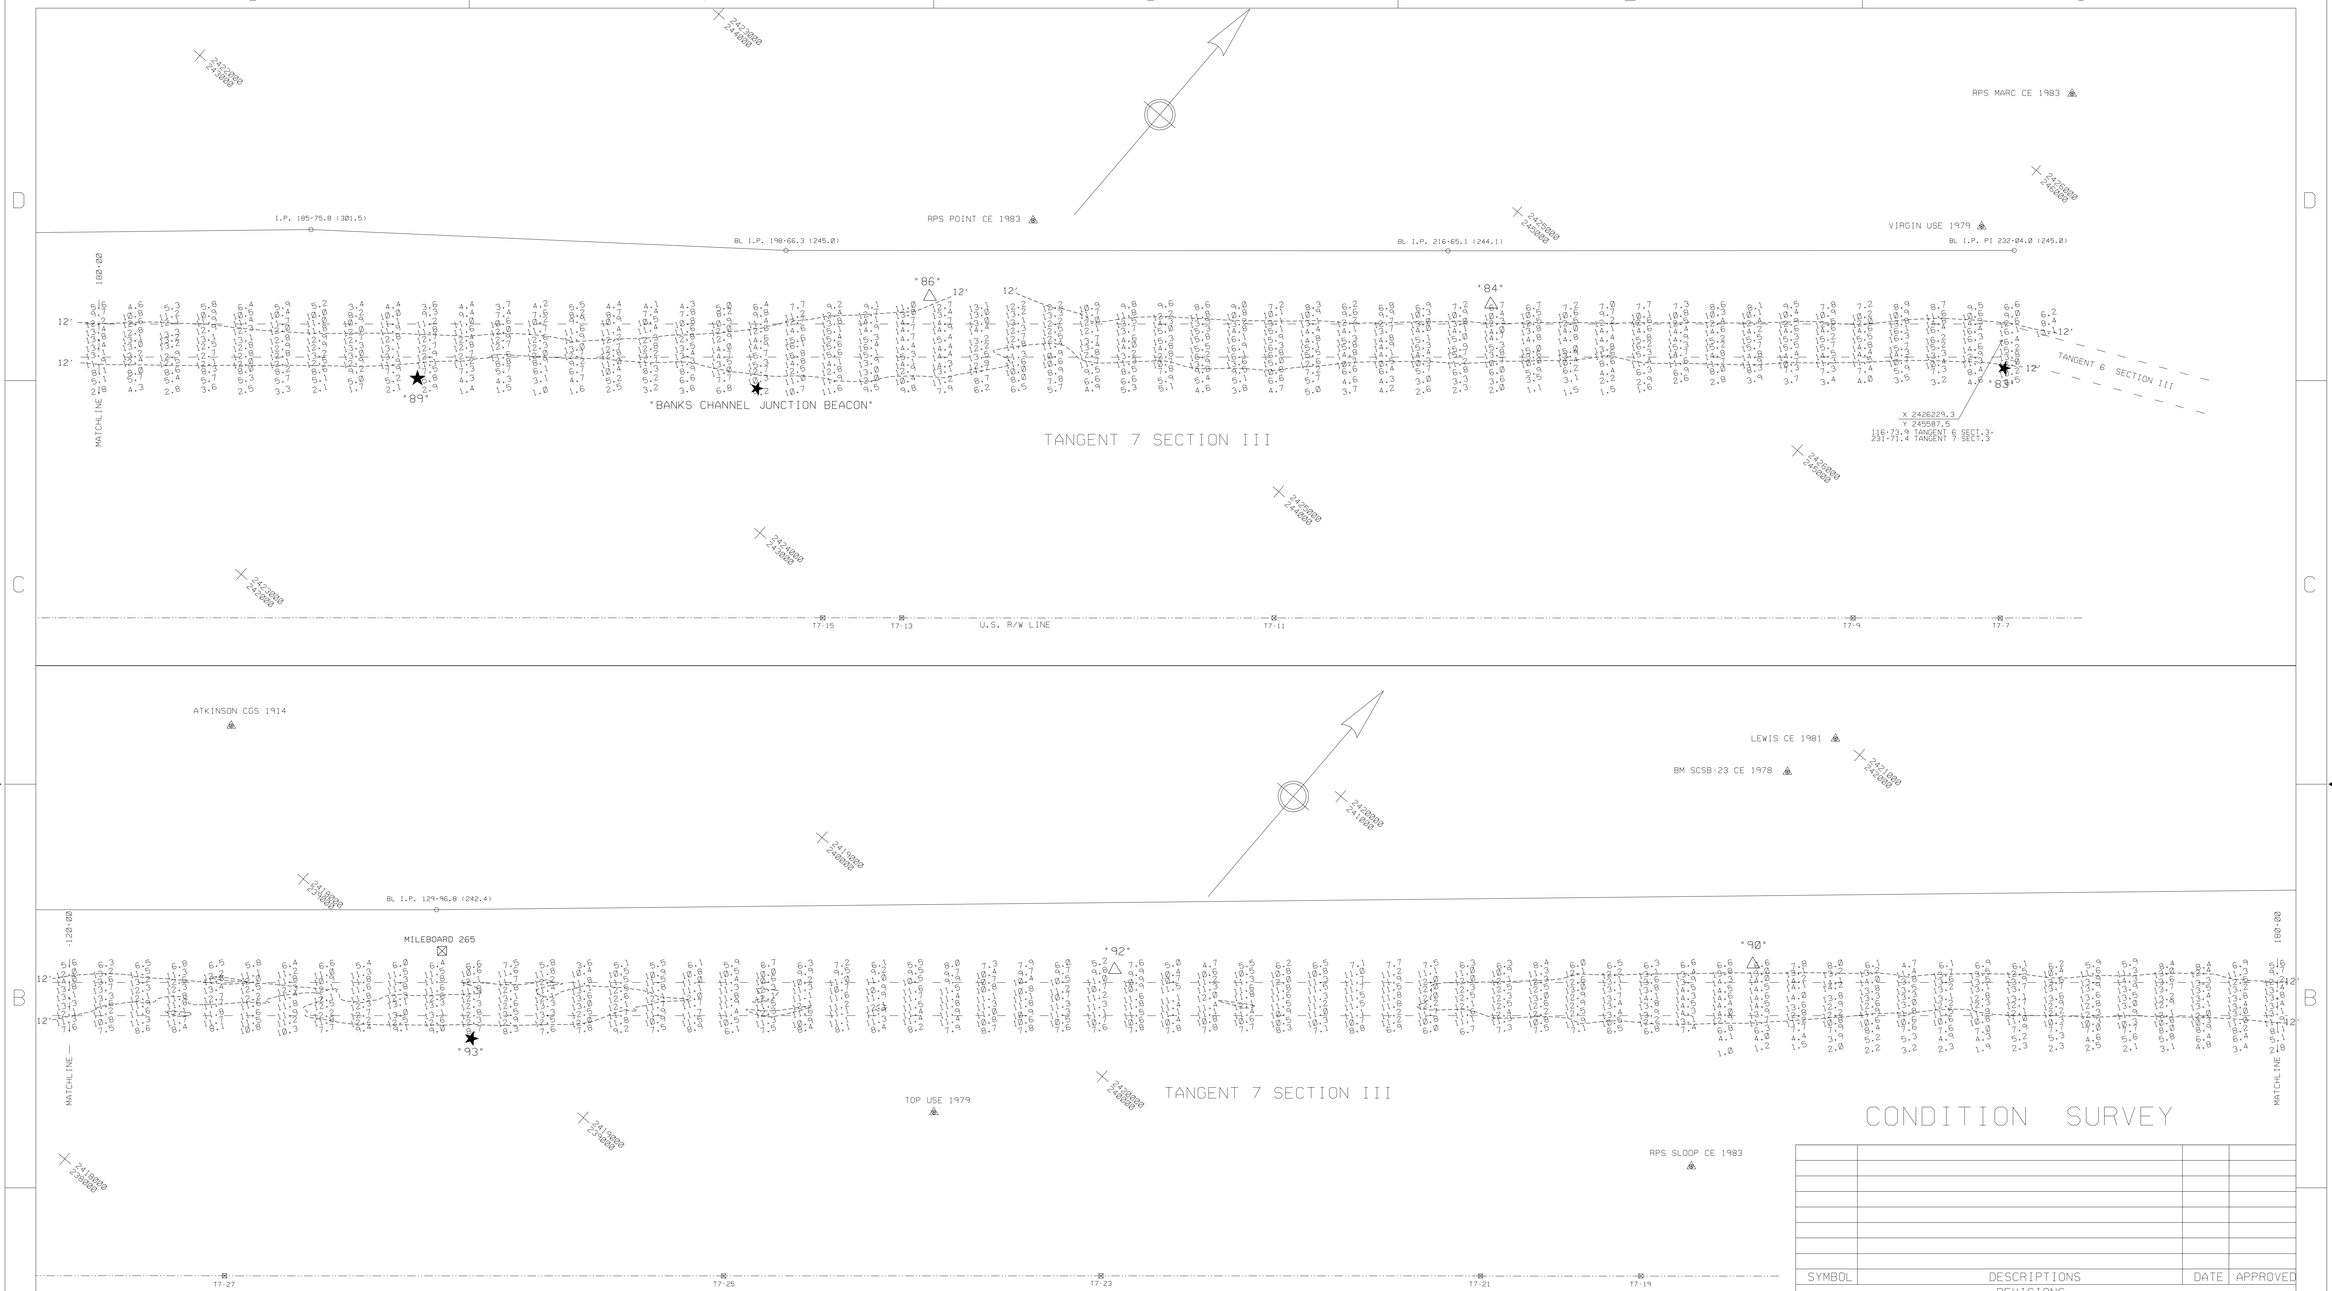

CONDITION SURVEY

NOTES:

SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO LOCAL M.L.W..

PROJECT SURVEYED WITH DISTRICT SURVEY VESSEL " HEWETT", USING DGPS HORIZONTAL POSITIONING EQUIPMENT AND 200 KHZ SOUNDING EQUIPMENT.

TIDE GAGE LOCATED AT: HARBOR VILLAGE MARINA SIGN

HORIZONTAL DATUM NAD 1983

THIS PROJECT WAS DESIGNED BY THE WILMINGTON DISTRICT OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATION DESIGNATIONS APPEAR ON THESE PROJECT DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152.

THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULT OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

NAVIGATION AIDS LOCATED WITH DISTRICT SURVEY VESSEL.
ACCURACY PLUS/MINUS 3 METERS.

BCN	* 83	2426283	245531	34.41629	77.58658
D.M.	* 84	2425102	244760	34.41420	77.59053
D.M.	* 86	2423933	243787	34.41158	77.59444
D.M.	* 90	2421146	241374	34.405086	77.60380
D.M.	* 92	2419837	240241	34.40200	77.60819
BCN	* 93	2418627	238967	34.39855	77.61226
DBCN	* 89	2423019	242717	34.40868	77.59753
DBCN	* 96	2408450	230582	34.37590	77.64637
MILEBOARD	* 265	2418412	239094	34.39890	77.61297
BANKS CHANNEL JUNCTION LIGHT		2423739	243291	34.41023	77.59511

SCALE: 1:2000

200 100 0 100 200 300

SCALE IN FEET

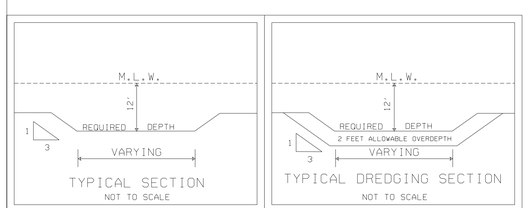

SYMBOL	DESCRIPTIONS	DATE	APPROVED

REVISIONS

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
WILMINGTON, NORTH CAROLINA

ATLANTIC INTRACOASTAL WATERWAY
BETWEEN
NORFOLK, VA. AND THE ST. JOHNS RIVER, FLA (WILMINGTON DISTRICT)

US ARMY CORPS OF ENGINEERS

BEAUFORT TO CAPE FEAR RIVER, N.C.

TANGENT 7 SECTION III

(STA. 0+00 - 120+00)

SURVEYED BY: MAS	SCALE: 1: 2000	PLATE NUMBER:	SURVEYED: 08 APRIL 2003
DRAWN BY: NRK	DATE: 08 APRIL 2003		
CHECKED BY:	MAP FILE NO. BFT-CFR 105-03-36		SHEET OF
REVIEWED BY:			
APPROVED BY:			
CHIEF.NAVIGATION BRANCH			

AIWW BFTCFR/2003/T7S3_098.CO/.DAT/.DGN/.XST

G:/WORK/3009SARK/t7s3_098.dgn 04/09/2003 11:08:59 AM